

# IAP100 Access Control

## Features

IP Based standalone or network.


Universal Wiegand input/output interface for master slave reader.

Built in relay contact for door inputs for door sensors/exit button.

Embedded webserver for local or remote access.

## Specification

- 30,000 users
- 50,000 Transaction capacity
- Proximity read range 5-8cm
- Read time <30ms
- Platform ZEM500 Linux OS
- Communication TCP/IP
- 12/24V relay Output
- Opto isolated inputs (door sensors exit button etc)
- 26 bit wiegand input/output
- 3 colour LED indicator
  - Blue Standby
  - Red Access Denied
  - Green Access Granted
- Power 12VDC
- Dimensions 153x96x36mm
- Operating temperature 0-45c
- Operating Humidity 20-80%
- Optional reader formats:
  - Mifare
  - HID
  - RFID
  - iClass

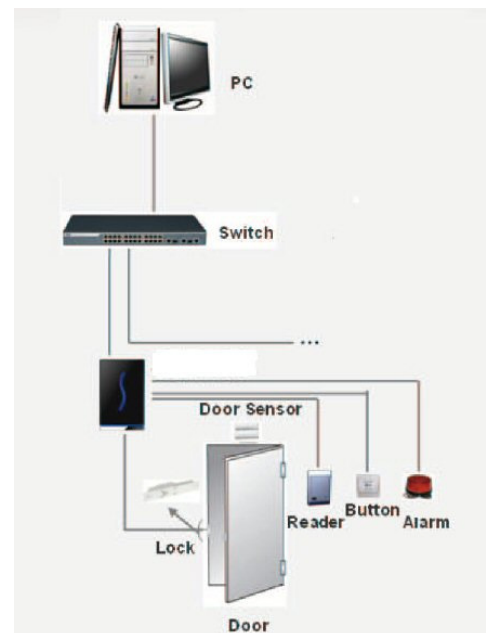

**Capture Services**  
397 Barrows Lane  
Sheldon  
Birmingham  
B26 1QQ

Tel: 0121 288 4110  
Email: info@capture-services.co.uk  
Web: www.capture-services.co.uk  
Reg in the UK GB 937941092

 **CAPTURE SERVICES**  
SFDC & ACCESS CONTROL

